




ULC-S601 Double Wall Tank

Double-wall steel tank compliant with ULC-S601, designed for aboveground outdoor installation at atmospheric pressure, providing a safe and durable storage solution.

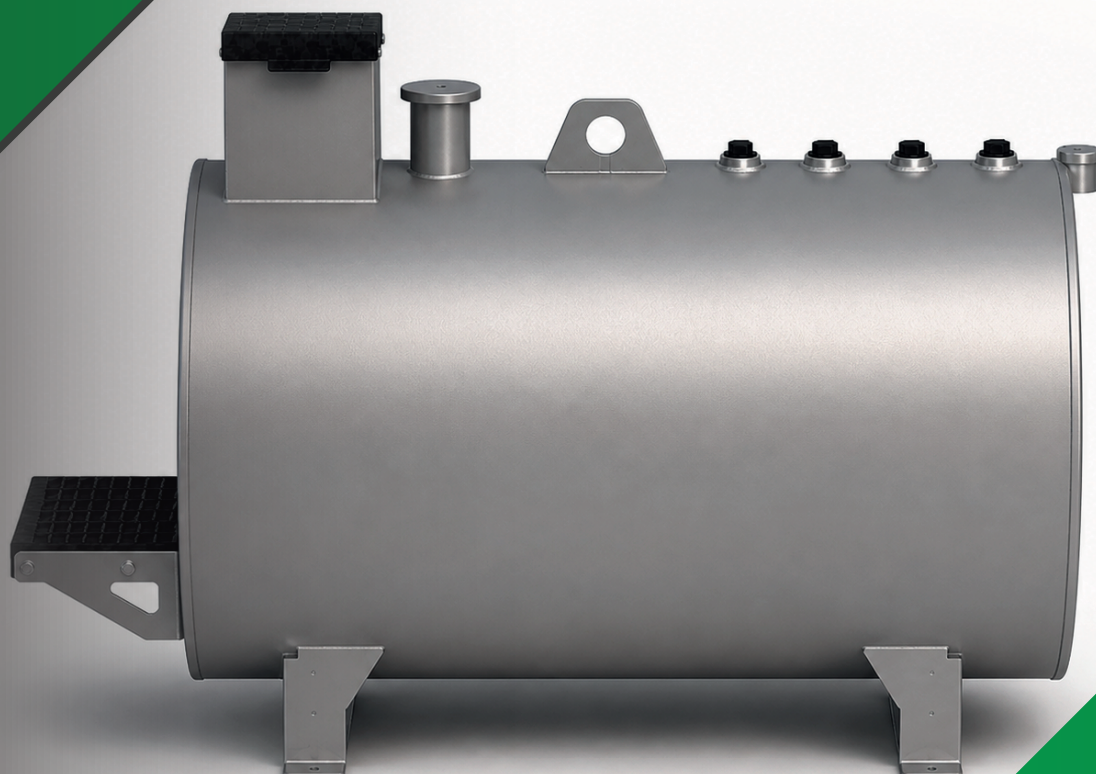

1 year (standard) – 10 years with vitreous enamel lining
(internal inspection required every 24 months)

Key Benefits

Key Features

- ULC-S601 compliant
- Double-wall steel construction
- Aboveground outdoor installation
- Atmospheric pressure operation
- Capacity up to 41,640 L (11,000 gallons)

Construction

- Exterior sandblasted finish
- Two-coat white epoxy finish

Options & Key Strengths

- Skid Base
- Skid Base with Platforms
- Stairs and Guardrails



For a custom design tailored to your project, contact your local representative or email us at info@gestionslbg.com