


## ASME BUFFER TANK

ASME | CSA | CRN

### Overview

Designed for commercial and industrial applications, the RT model provides a reliable solution compliant with ASME and CSA standards, with customization options available.

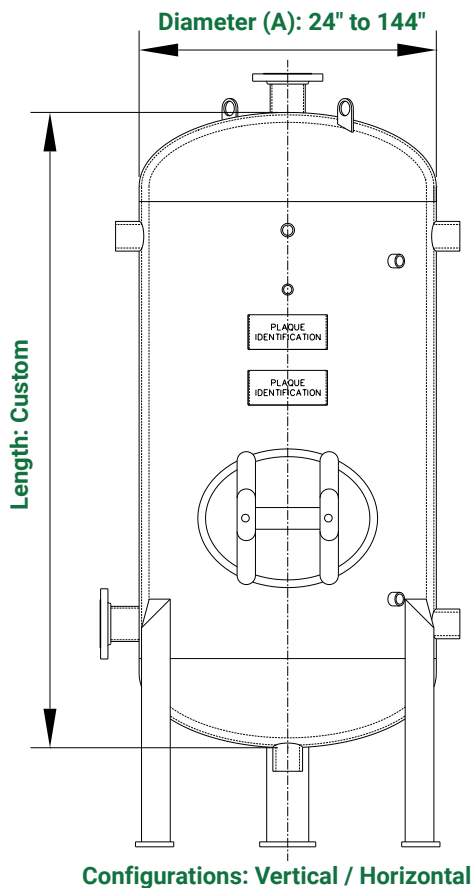


|                      |                          |
|----------------------|--------------------------|
| <b>PRESSURE</b>      | 125 à 200 psi            |
| <b>DIAMETER</b>      | 24" à 144"               |
| <b>CONFIGURATION</b> | Vertical / Horizontal    |
| <b>MATERIALS</b>     | Carbon Steel / Stainless |

### Operating Pressure

| psi | kPa   |
|-----|-------|
| 125 | 862   |
| 150 | 1 034 |
| 200 | 1 379 |

### Key Features

- Designed in accordance with ASME Section VIII, Division 1
- CSA B51 compliant
- CRN registered in all provinces
- Hydrostatically tested
- Replaceable aluminum anodes

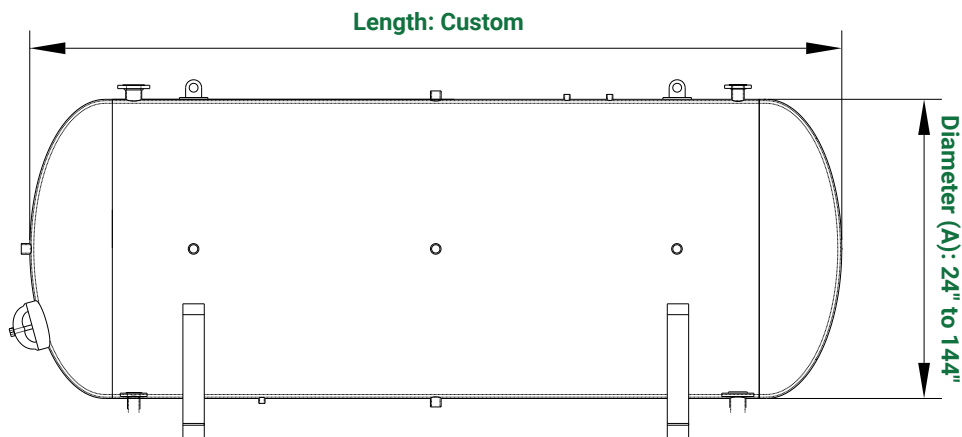

## Options

- Horizontal version with steel saddle supports
- Horizontal version with floor-mounted steel saddle supports'
- Bottom tank connection
- Internal baffle for more uniform mixing

## Insulation

- Fiberglass insulation with FSK vapor barrier facing
- Stucco aluminum cladding
- Thermal performance: R-4 per inch

## Connections & Inspection Access

- Connections: Victaulic, Flanged, Threaded
- Inspection Access: Handhole (4" x 6", 6" x 8") / Manway (12" x 16")



For a custom design tailored to your project, contact your local representative or email us at [info@gestionslb.com](mailto:info@gestionslb.com)

## Warranty

**Standard**  
1 Year

**With Concrete Lining**  
10 Years (Internal Inspection Required Every 24 Months)



**CRN**